



SYLVAN SPORT

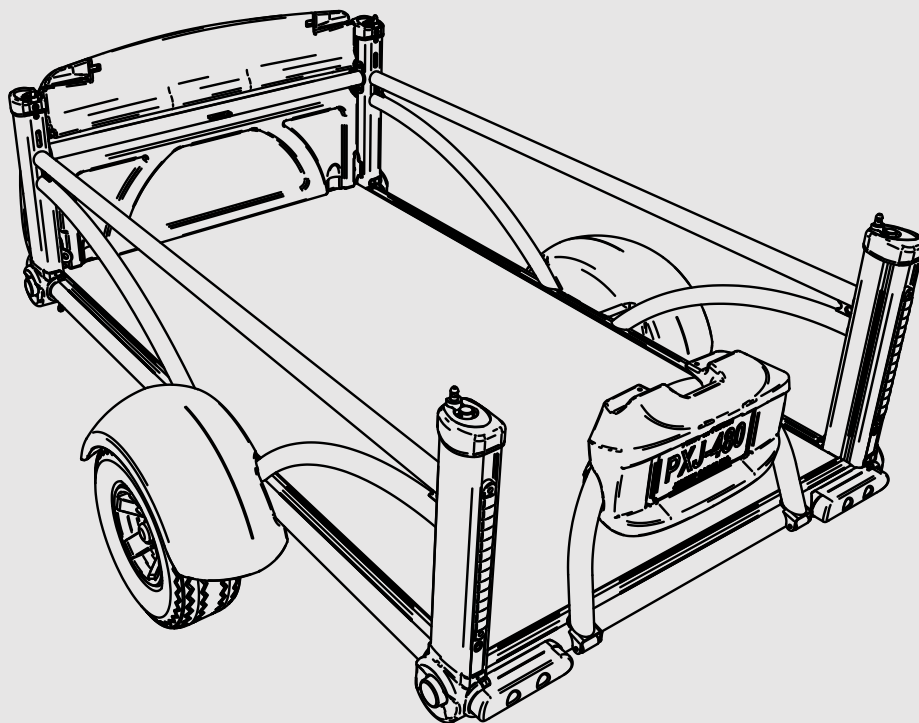


SylvanSport GO Rack and Bed Platform Removal Instructions

1

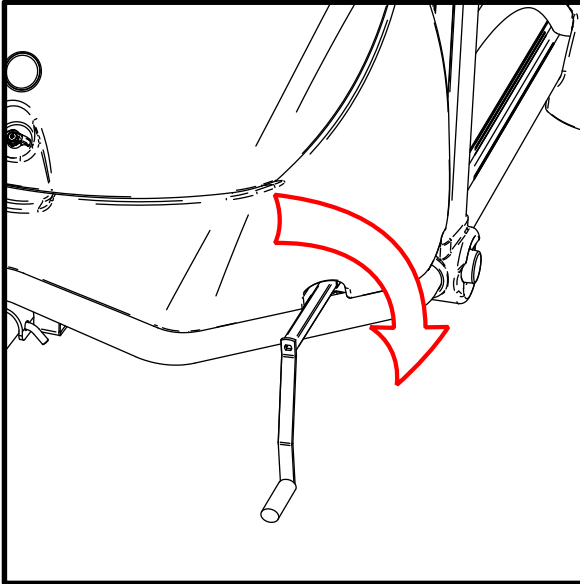

Raise Rack using crank handle


2

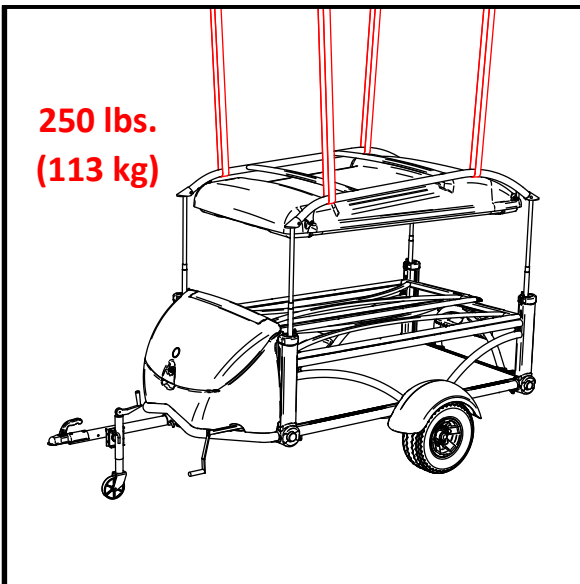

250 lbs.
(113 kg)

Attach straps to support Rack and Tent Pod. Straps must be able to safely support at least 250 lbs.

3

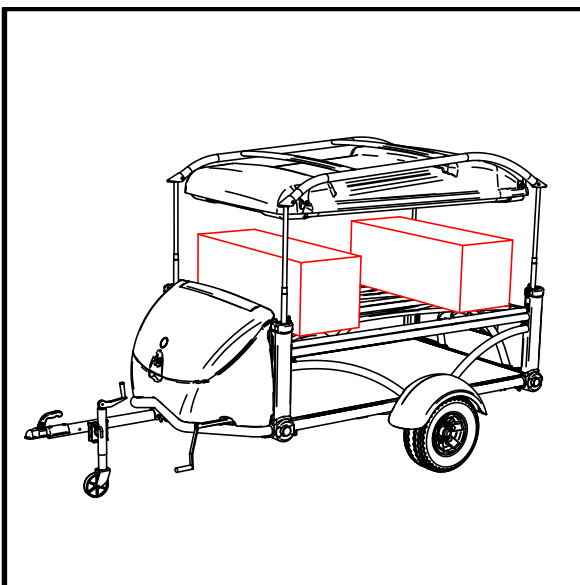


As an alternative to step 2, two sturdy boxes can be placed on the Bed Platforms as shown. The Tent Pod can be lowered onto the boxes to relieve the load on the Lift Tubes (as described in the next step).

Four people are required to lift the Rack and Pod off the trailer for storage.


SylvanSport GO Rack and Bed Platform Removal Instructions

4

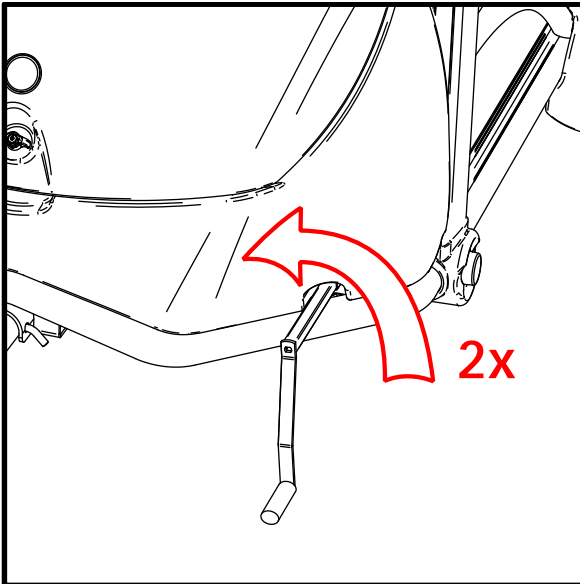


Rotate crank counter-clockwise two revolutions to allow the straps to hold the Rack and Tent Pod and relieve the load on the Lift Tubes.

5

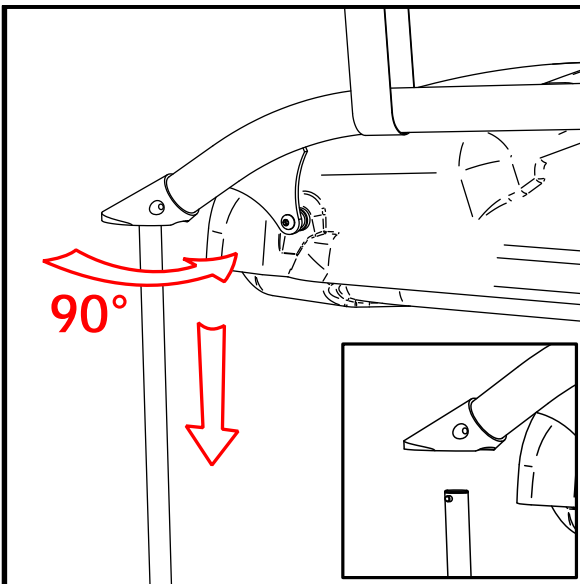

Rotate Lift Tube 90° and pull downward. Repeat for each corner of Rack.


6

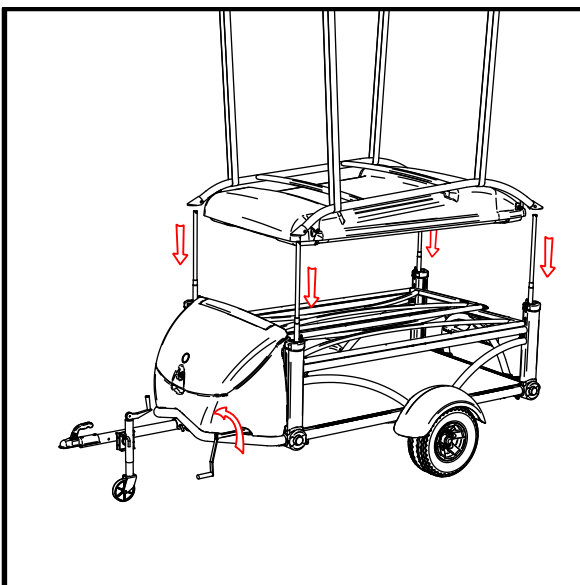

Continue to turn crank handle counter-clockwise while pushing Lift Tubes downward until they are flush with the top of the corner posts.

SylvanSport GO Rack and Bed Platform Removal Instructions


7

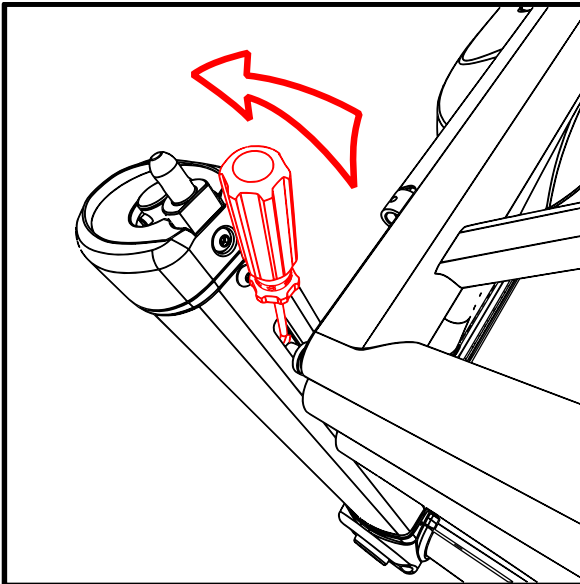

To remove Bed Platforms, use a flat screw driver to locate the retracting pivot pin on the Bed Frame. Usually, it is the end toward the rear of the trailer.

Depress the pin by prying the screw driver against the frame.


8

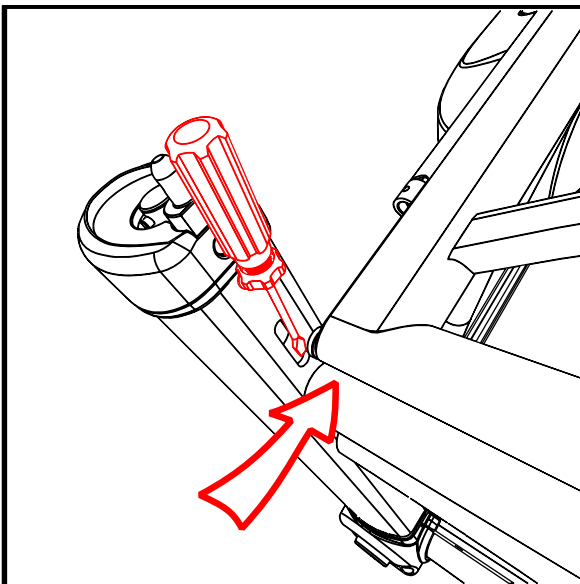

When the pin is fully retracted, push the Bed Platform frame inward to release the pin from the slot in the corner post.

With assistance from a friend, carefully lift and remove the bed platform. Be careful not to lose the black washer bushings.

9

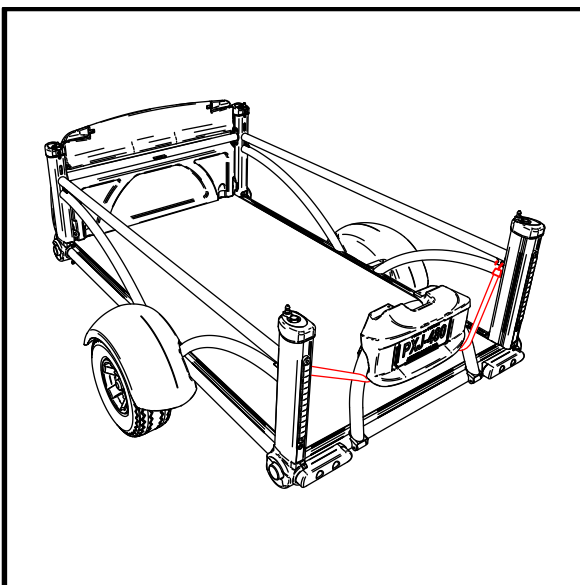


Secure the tailgate with a strap to ensure it remains upright during travel.


SylvanSport GO Rack and Bed Platform Removal Instructions

Re-Assembly

Re-assembly is essentially done in the reverse order. Please note the following important guidelines:

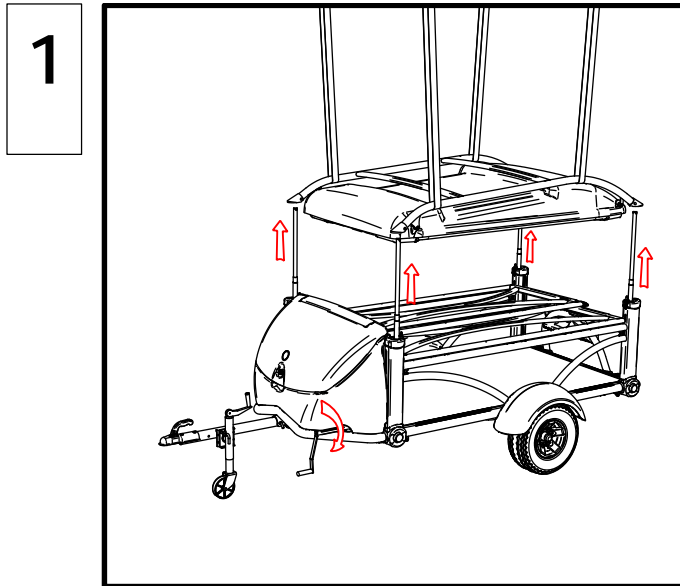

Carefully position the trailer beneath the suspended Rack and Tent Pod. Crank the Lift Tubes up until they are just beneath the Rack feet.

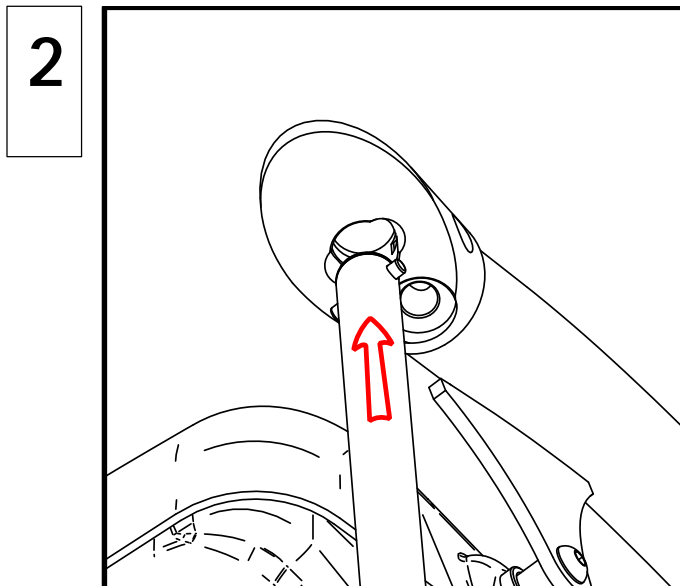

By hand, lift each Tube and push it into the Rack foot making sure that the pins are aligned with the tapered scallops on the edges of the hole. Do not twist.

The Tube should “click” in place.

Pull downward on the Tube to make sure the connection is secure.

Crank the Lift Tubes up more to unweight the straps holding the Rack. Remove steps.