

Tail Lamp Replacement

Step 1: Use Phillips screw driver to remove two screws securing lamp



Step 2: Gently pull lamp and wires to expose the red connectors.

NOTE: The wire colors on the lamp do not necessarily match the wire colors on the trailer.



Step 3: Cut one of the lamp wires. If there is enough exposed wire, make the cut so the red connector is removed with the old lamp.

NOTE: The wire colors on the lamp do not necessarily match the wire colors on the trailer.




Step 4: Connect the clipped wire to the appropriate wire on the new lamp using the included connectors. Make sure that the new lamp wire color is the same as the old lamp wire color that you just cut.



Step 5: Close the connector cover.

Repeat steps 3 - 5 for the remaining two wires. Cutting and splicing one wire at a time will ensure the wiring will be correct.

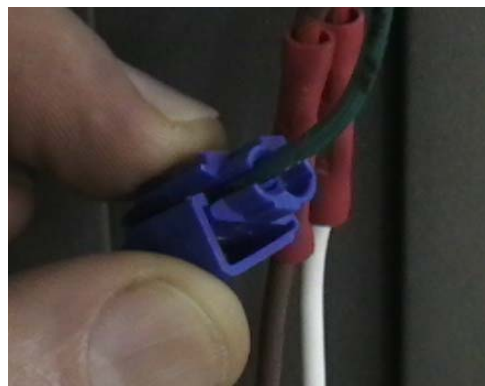

Step 6: Reinsert wires into frame and reattach the lamp with the two screws. Be careful not to overtighten the screws.

Note: The wire colors shown in this bulletin may not be the same as those on your trailer.

